# LED - Ginger
## Joan Gaspar

marset

The Ginger collection has moved outdoors, with a series of wall sconces, including a new 15 cm sconce — perfect for passageways and small outdoor areas — a lamppost, and small bollard lamps. The collection features new floor lamps, raised by means of a post that can be buried in dirt or gravel, perfect for illuminating pathways, gardens, terraces, and walls, and blending nicely with vegetation.
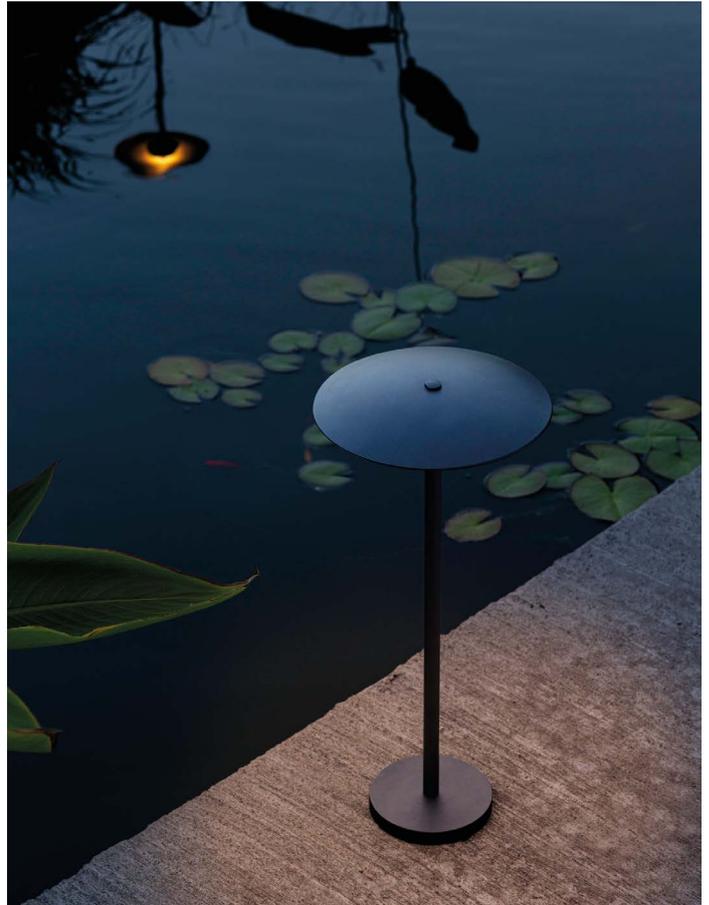




## LED - Ginger B32/65

**Code**
A662-760-31-27K
A662-760-39-27K

**Finish**
🔴 Rust brown - White
⚫ Black-White (RAL 9005-9010)

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: It depends on the purchased power supply.

**Materials**
Diffuser: Aluminum
Structure: Stainless steel

Cable length: 8.5 ft

Suitable for wet locations

LED included

(ETL)us  (Dimmable)

**Electrical**
Electrical Rating: 24Vdc 10W
Luminaire: 350lm
CCT: 27K
CRI: 90

Product notes: 24V remote power supply to be ordered separately.



12.6"
2.3"
25.6"
Ø4.3"
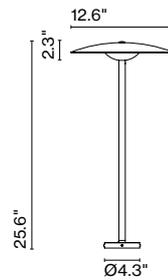
## LED - Ginger B32/88

Code
A662-761-31-27K
A662-761-39-27K

Finish
● Rust brown - White
● Black-White (RAL 9005-9010)

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: It depends on the purchased power supply.

Materials
Diffuser: Aluminium
Dissipater: Stainless steel

Cable length: 7.6 ft.

Suitable for wet locations

LED included

Electrical
Electrical Rating: 24Vdc 10W
Luminaire: 350lm
CCT: 27K
CRI: 90

Product notes: 24V remote power supply to be ordered separately.

12.6"
2.3"
34.7"
Ø4.3"
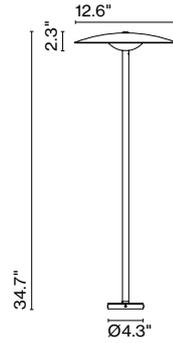
## LED - Ginger B32/111

Code
A662-762-31-27K
A662-762-39-27K

Finish
● Rust brown - White
● Black-White (RAL 9005-9010)

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: It depends on the purchased power supply.

Materials
Diffuser: Aluminium
Dissipater: Stainless steel

Cable length: 6.9 ft.

Suitable for wet locations

LED included

Electrical
Electrical Rating: 24Vdc 10W
Luminaire: 350lm
CCT: 27K
CRI: 90

Product notes: 24V remote power supply to be ordered separately. Dimming protocols: 0-10V

Ø7.7"
1.6"
33.9"
Ø4.3"
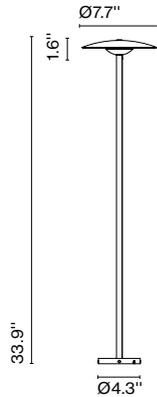
## Post Accessory

| Code | Finish |
|------|--------|
| A662-555 | ● Stainless steel |

Materials
Structure: Stainless steel 316 L

Ø3"

9.7"

## Ground fixation plate

| Code | Finish |
|------|--------|
| A662-556 | ● Stainless steel |

Materials
Structure: Stainless steel 316 L

3.5"

4.9''

## Power supply - Dimmable

| Code | Description | Dimming | Class | Electrical Rating |
|------|-------------|---------|-------|-------------------|
| 968-230 | Power supply 60W - 24V | 0-10V | 2 | 120-277VAC Max.60W |
| 968-233 | Power supply 100W - 24V | 0-10V | 2 | 120-277VAC Max.100W |

## LED-Ginger: Connector accessory

| Code | Description |
|------|-------------|
| A963-001 | 2 way terminal block 4 poles IP68 H2O Stop. (ø0.2/0.5" cable). |

Ø0.9"

3.1"

| A963-002 | 3/4 way terminal block 4 poles IP68 H2O Stop. (ø0.2/0.5" cable). |

2.2"

3.3"

marsetusa@marset.com
www.marset.com

**Download**  Photometric data file (LDT or IES)
2D, 3D, Photometric Data
Assembly instructions

**Collection**